


FINGER POWER CHUCK



- 採工件端面夾持，防止工件夾持變形，適合薄壁工件加工。
- 夾持補償機構，可夾持不規則端面之工件。
- 夾頭中心可裝設工件密著確認裝置。
- Prevent deformation of workpiece for gripping the terminal surface, suitable for thin workpiece process.
- The compensating mechanism of gripping that can grasp the workpieces of the irregular surface.
- Additional check device able to install in the center of chuck.

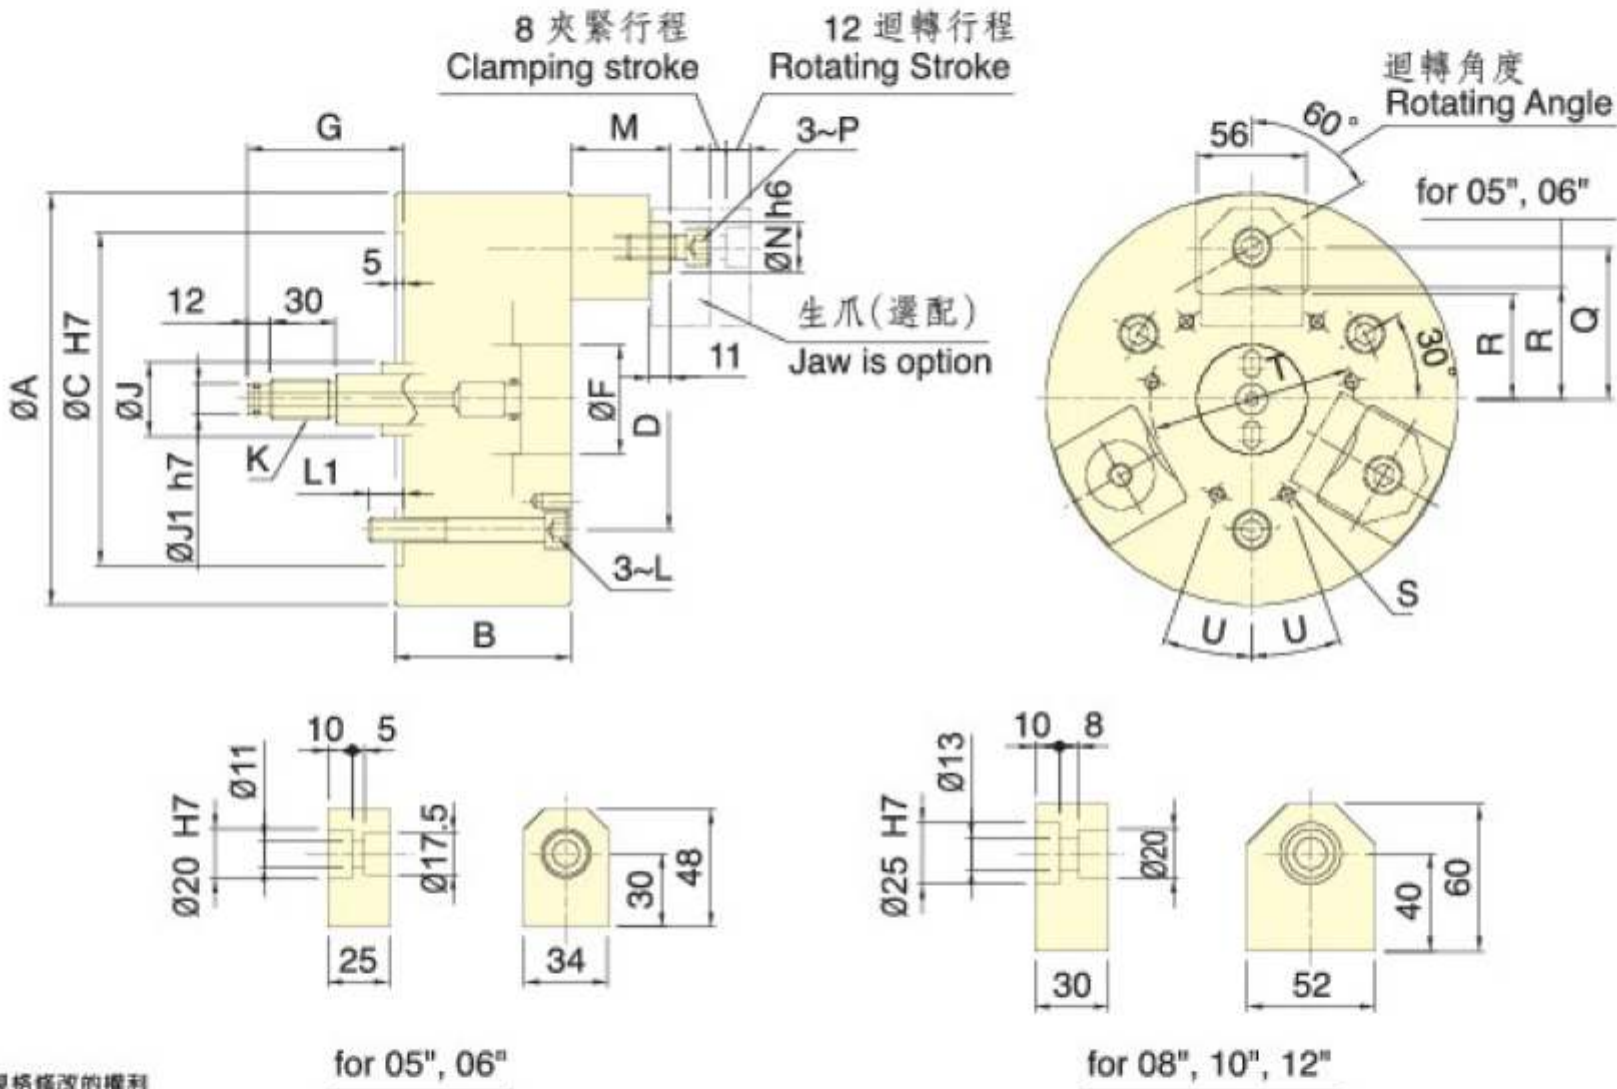

保留規格修改的權利
Subject to technical changes.


規格 Spec. 型號 Model	迴轉行程mm Rotating stroke	夾持行程mm Clamping stroke	夾持直徑Chuckng Dia.mm		容許油壓缸拉力kN(kgf) Max. D.B. pull	最大夾持力 kN(kgf) Max. clamping force	最高迴轉數min ⁻¹ (r.p.m) Max. speed	I kg·m ²	重量kg Weight	適用迴轉缸 Matching cyl.	最大使用壓力 Max. pressure Mpa (kgf/cm ²)
			最大 Max.	最小 Min.							
3J-05	12	8	53	25	7.5(765)	6.0(612)	4000	0.02	11.0	RK-100 or RK-100(N)	1.0(10)
3J-06			79	55	9.0(918)	7.5(765)		0.04	12.0		1.2(12)
3J-08			106	75	18.0(1835)	16.5(1680)	3500	0.13	23.0		2.5(25)
3J-10			150	119				0.30	33.0		
3J-12			200	169			3000	0.56	44.0		

寸法 Size 型號 Model	A	B	C	D	F	G		J	J1	K	L	L1	M		N	P	Q	R	S	T	U								
						max.	min.						max.	min.															
3J-05	135	86	110	82.6	40	75	55	25	10	M12x1.75	M10	15	56	36	20	M10	42.5	27	3~M6	50	-								
3J-06	165		140	104.8	45			28	14	M16x2							57.5	40	3~M8	64									
3J-08	210	90	170	133.4	56	80	60	38	16	M20x2.5	M12	18	71	51	25	M12	77.5	53.5	6~M8	104	20°								
3J-10	254	95	220	171.4		75	55				M16	24					99.5	75.5		140									
3J-12	304																124.5	100.5		190									

FINGER POWER CHUCK



- 採工件端面夾持，防止工件夾持變形，適合薄壁工件加工。
- 夾持補償機構，可夾持不規則端面之工件。
- 夾頭中心可裝設工件密著確認裝置。
- Prevent deformation of workpiece for gripping the terminal surface, suitable for thin workpiece process.
- The compensating mechanism of gripping that can grasp the workpieces of the irregular surface.
- Additional check device able to install in the center of chuck.

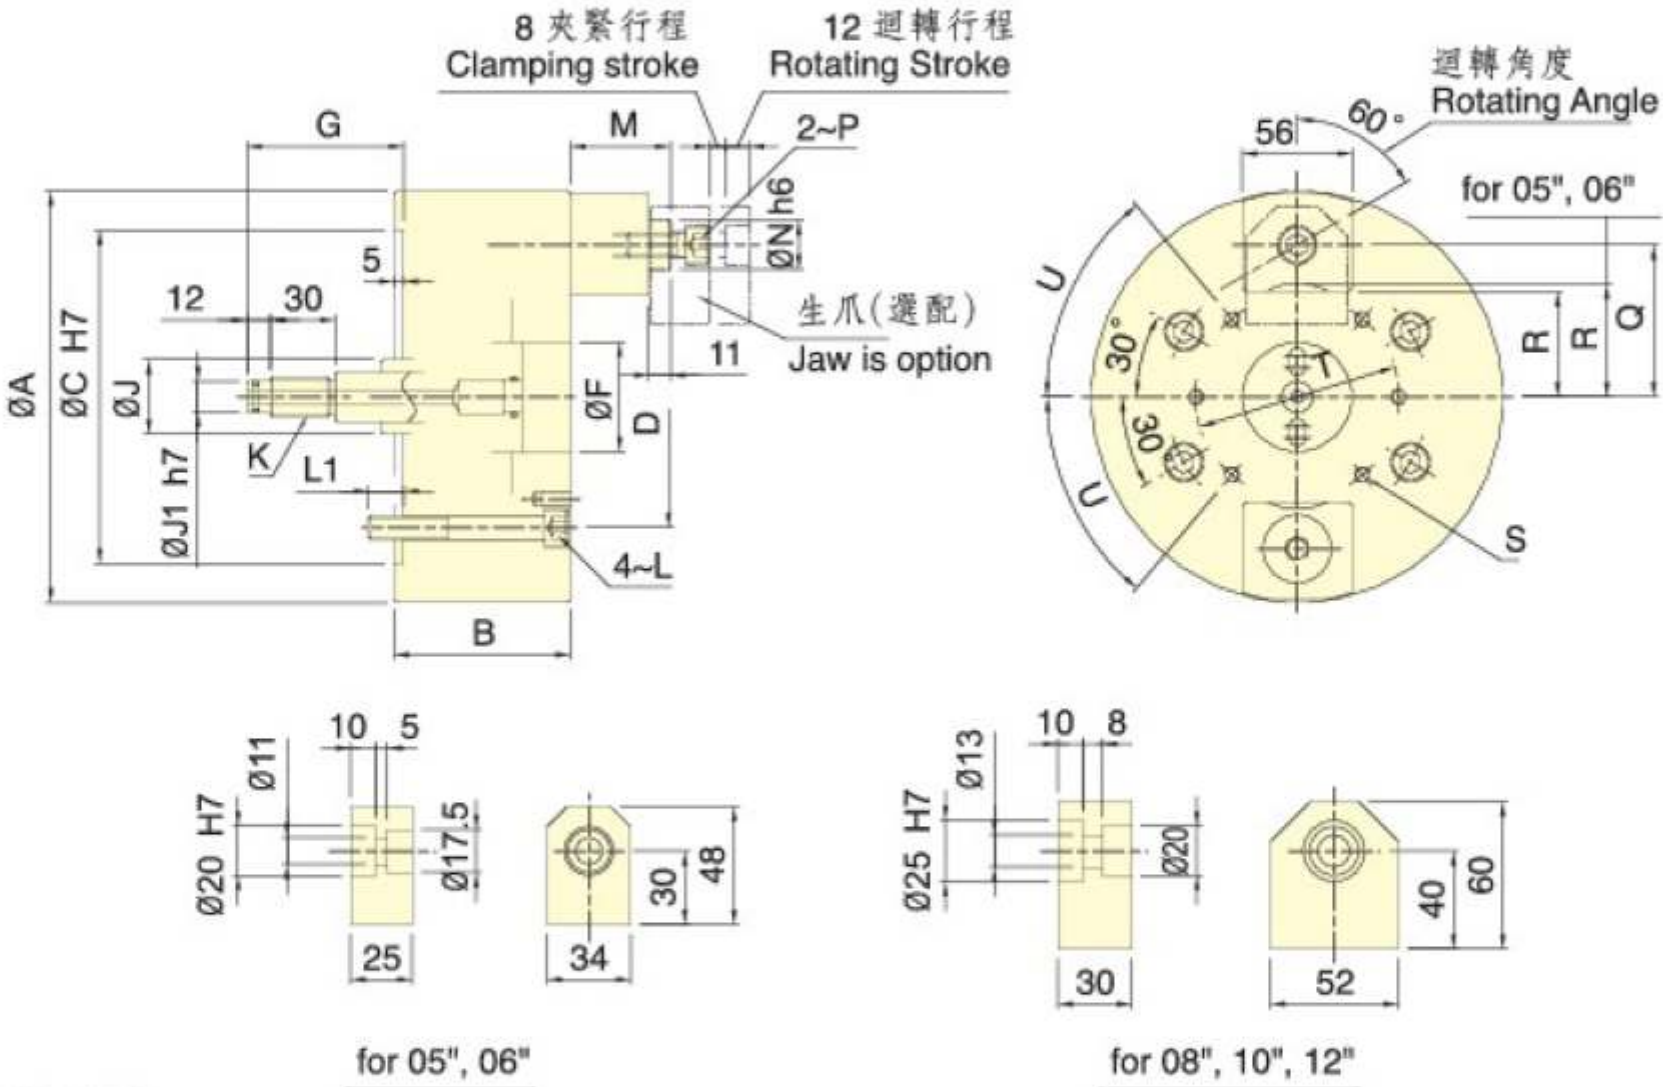

保留規格修改的權利
Subject to technical changes.

規格 Spec. 型號 Model	楔心行程mm Plunger stroke	夾持行程 mm Clamping stroke	夾持直徑 Chucking Dia.mm		容許油壓缸推力 kN(kgf)	最大夾持力 kN(kgf)	最高迴轉數 min ⁻¹ (r.p.m)	I kg·m ²	重量kg Weight	適用迴轉缸 Matching cyl.	最大使用壓力 Max. pressure Mpa (kgf/cm ²)
			最大 Max.	最小 Min.	Max. D.B. pull	Max. clamping force	Max. speed				
2J-05	12	8	53	25	5.0(510)	4.0(408)	4000	0.015	9.0	RK-100 or RK-100(N)	0.7(7)
2J-06			79	55	6.0(612)	5.0(510)		0.035	9.8		0.8(8)
2J-08			106	75	12.0(1224)	11.0(1122)	3500	0.12	20.3		1.7(17)
2J-10			150	119				0.28	30.7		
2J-12			200	169			3000	0.52	41.2		

寸法 Size 型號 Model	A	B	C	D	F	G		J	J1	K	L	L1	M		N	P	Q	R	S	T	U								
						max.	min.						max.	min.															
2J-05	135	86	110	82.6	40	75	55	25	10	M12x1.75	M10	15	56	36	20	M10	42.5	27	4~M6	50	30°								
2J-06	165		140	104.8	45			28	14	M16x2							57.5	40	4~M8	64									
2J-08	210	90	170	133.4	56	80	60	38	16	M20x2.5	M12	18	71	51	25	M12	77.5	53.5	6~M8	104	50°								
2J-10	254	95	220	171.4		75	55				M16	24					99.5	75.5		140									
2J-12	304																124.5	100.5		190									