



FOUR-JAW TWO MOTION TYPE POWER CHUCK

專利產品字號: 台灣: PAT.M359385號 (Taiwan)
大陸: PAT.ZL2009.2.009399.1號 (China)

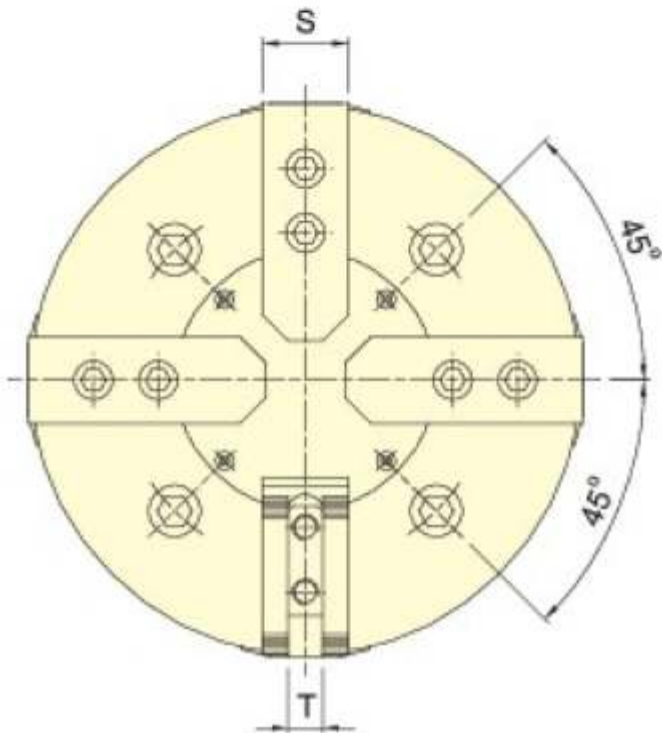

- ◉ 曲柄型雙副兩爪各自動作之特殊夾頭。
- ◉ 特別適合方形材或其它非規則形狀的工件。
- ◉ It's a CRANK type with two pairs of 2 jaws self center independent of each other.
- ◉ The 4T series is suitable for square bar and other nonuniform shaped workpieces.

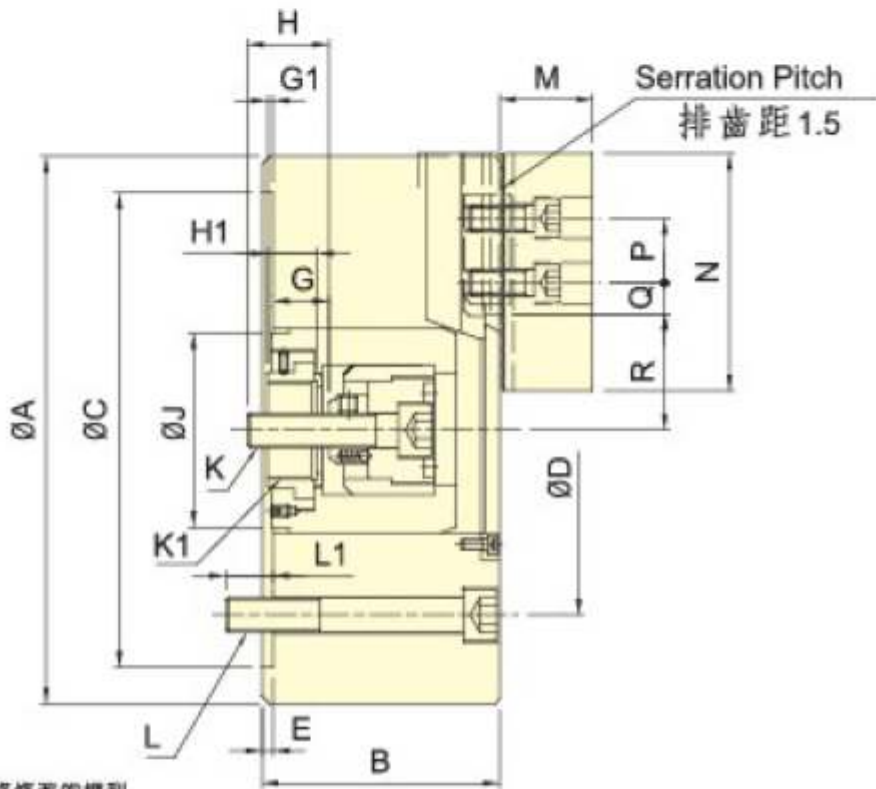

保留規格修改的權利
Subject to technical changes.

規格 Spec. 型號 Model	楔心行程mm Plunger stroke	爪行程(直徑)mm Jaw stroke(Dia.)	夾持範圍 Clamping Range mm		容許油壓缸拉力 kN(kgf) Max. D.B. pull	最大夾持力 kN(kgf) Max. clamping force	最高迴轉數 min ⁻¹ (r.p.m) Max. speed	I kg·m ²	重量 kg Weight	適用迴轉缸 Matching cyl.	最大使用壓力 Max. pressure Mpa (kgf/cm ²)
4T-08	17	13.6	210	24	16.0(1630)	54.3(5540)	3000	0.15	23.2	RD-120(N)	1.7(17)
4T-10	20	16	254	50	21.6(2200)	79.4(8100)	2100	0.35	44.3	RD-125(N)	2.2(22)
4T-12			304				1500	0.66	57.6		
4T-15	25	19.6	381	60	27.2(2780)	105.3(10750)	1200	2.25	118.3		2.7(27)

寸法 Size 型號 Model	A	B	C (H6)	D	E	G _{max.}	G _{min.}	G1 _{max.}	G1 _{min.}	H	H1	J	K
4T-08	210	91	170	133.4	5	32	15	4	-13	29	20	66	M14x2
4T-10	254	110	220	171.4		36.5	16.5	10	-10	36	23	90	M16x2
4T-12	304												
4T-15	381	135	300	235	6	44.5	19.5	5	-20	45	28	125	M20x2.5

寸法 Size 型號 Model	K1	L	L1	M	N	P	Q _{max.}	Q _{min.}	R _{max.}	R _{min.}	S	T	
4T-08	M34x1.5	4~M12	20	38	95	25	25.25	13.25	46.1	39.3	35	14	
4T-10	M45x1.5	4~M16		25	43	110	30	32.25	12.75	59	51	40	16
4T-12								56.75	13.25				
4T-15	M55x2	4~M20	30	51	130	30	66.5	12.5	78.9	69.1	50	21	