


ROTATING HYDRAULIC CYLINDER



- 短型, 高速, 輕量型迴轉油壓缸.
- 安裝時可由後端鎖固之.
- For short form, light weight and high speed rotary cylinder.
- Can screw it from the rear end of the cylinder when mounting.
- 洩油孔配管務必單獨接回油壓槽, 以避免產生背壓.
- The drain port should be independently connected to oil tank to avoid back pressure.

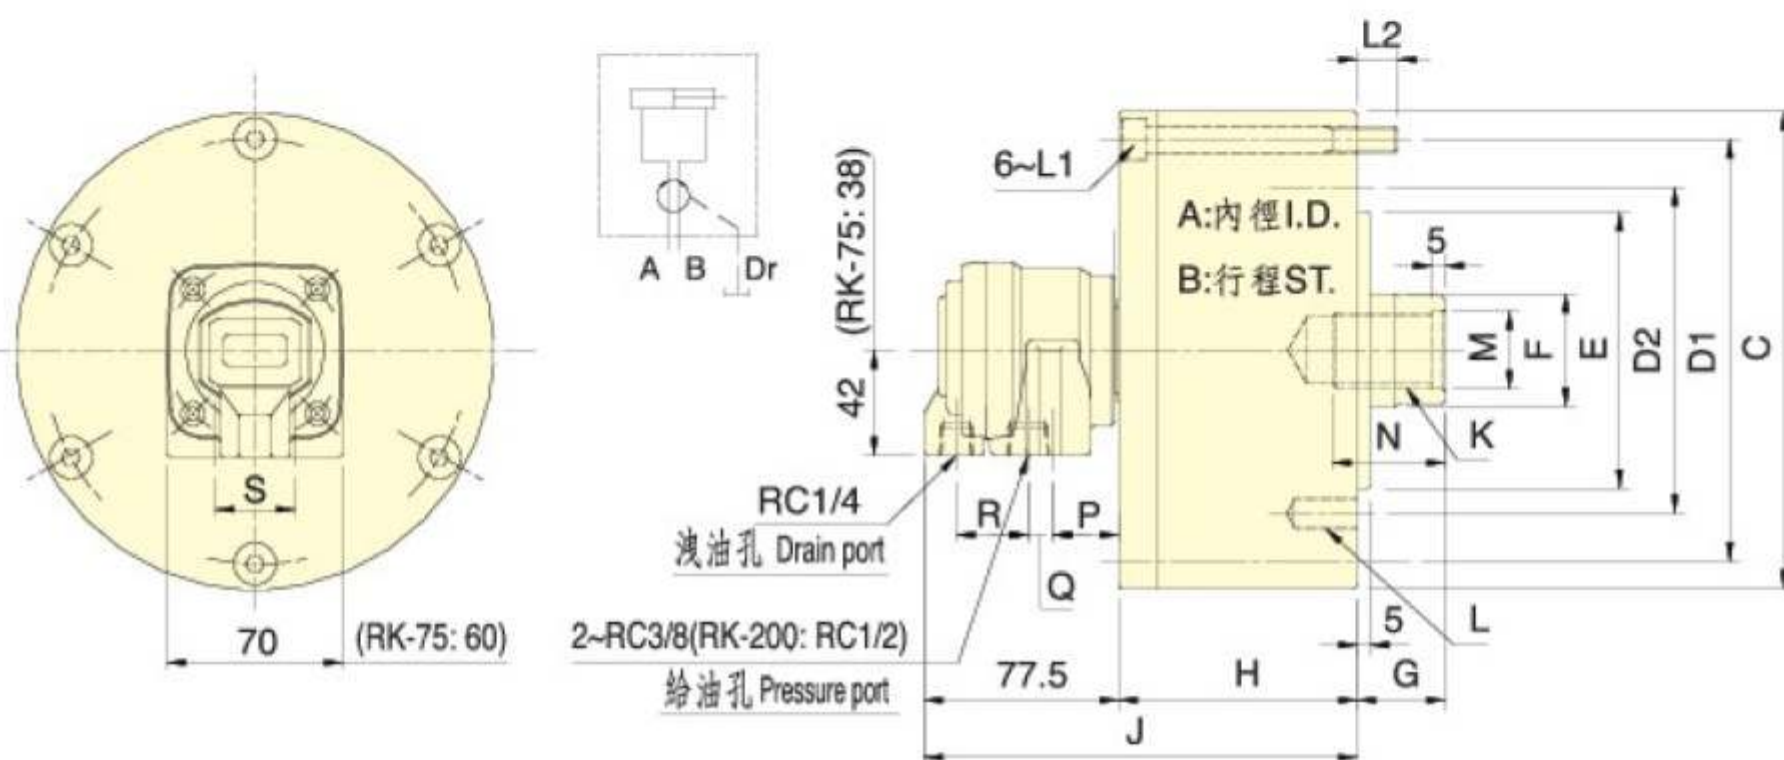

保留規格修改的權利
Subject to technical changes.

规格 Spec.	活塞面积 Eff. piston area cm ²		行程 mm Piston stroke	最高运转数 min ⁻¹ (r.p.m) Max. speed	最高使用压力 MPa Max. pressure (kgf/cm ²)	I kg·m ² Moment of inertia	重量 kg Weight
型号 Model	伸侧 Extend	拉侧 Retract					
RK-75N	44.2	37.1	15	6000	4.0 (40)	0.01	2.8
RK-100N	78.5	71.5	20			0.03	4.3
RK-125N	122.7	113.1	25			0.05	6.8
RK-150N	176.7	160.8	30	5500		0.09	9.4
RK-200N	314.1	290.4	35			0.28	15.3
RK-250N	469.1	436.0	60	2000	5.0(50)	0.40	45.2

寸法 Size 型號 Model	A	B	C	D1	D2	E h7	F	G		H	J	K	L	L1	L2	M H8	N	P	Q	R	S	
								max.	min.													
RK-75N	75	15	107	90		65	30	45	30	57	134	M20x2.5	6-M8x16	M8x60	12	21	35	28	10	27.5	26	
RK-100N	100	20	132	115	100	80					72		149	6-M10x20			M8x75					
RK-125N	125	25	160	140	130	110			35	50	25		82	159			M24x3.0	6-M12x20				M8x85
RK-150N	150	30	190	170			45	55		95	172	M30x3.5	12-M12x24	M10x100	16	32	45	26				
RK-200N	200	35	245	220	145	120	55	70	35	115	192	M36x4.0	12-M16x30	M10x125	21	38	60	30				6
RK-250N	245	60	307	275	220	160	65	85	25	165	255	M42x3.0	6-M20x2.5	M16x175	28	45	65	37	18	6	—	