


自動分度夾頭



POWER INDEXING CHUCK



- 主軸運轉過程中進行分度操作，可於多個工作軸之間進行快速轉換。
- 夾頭內部零件均經硬化及精密研磨，並直接潤滑。
- 防水及防切屑設計。
- 高剛性結構及高重複精度。
- 獨特的分度系統及液壓系統，夾頭有壓力檢知機構，可靠性高。
- Indexing operates during the spindle rotation, can a quick change between multiple working axes.
- Chuck of all parts hardened, ground and lubricated directly.
- Sealed against swarf, chips and coolant.
- Construction of high rigidity and high repeatability precision.
- Unique indexing system and of hydraulic system, with pressure detection device in chuck, high reliability.

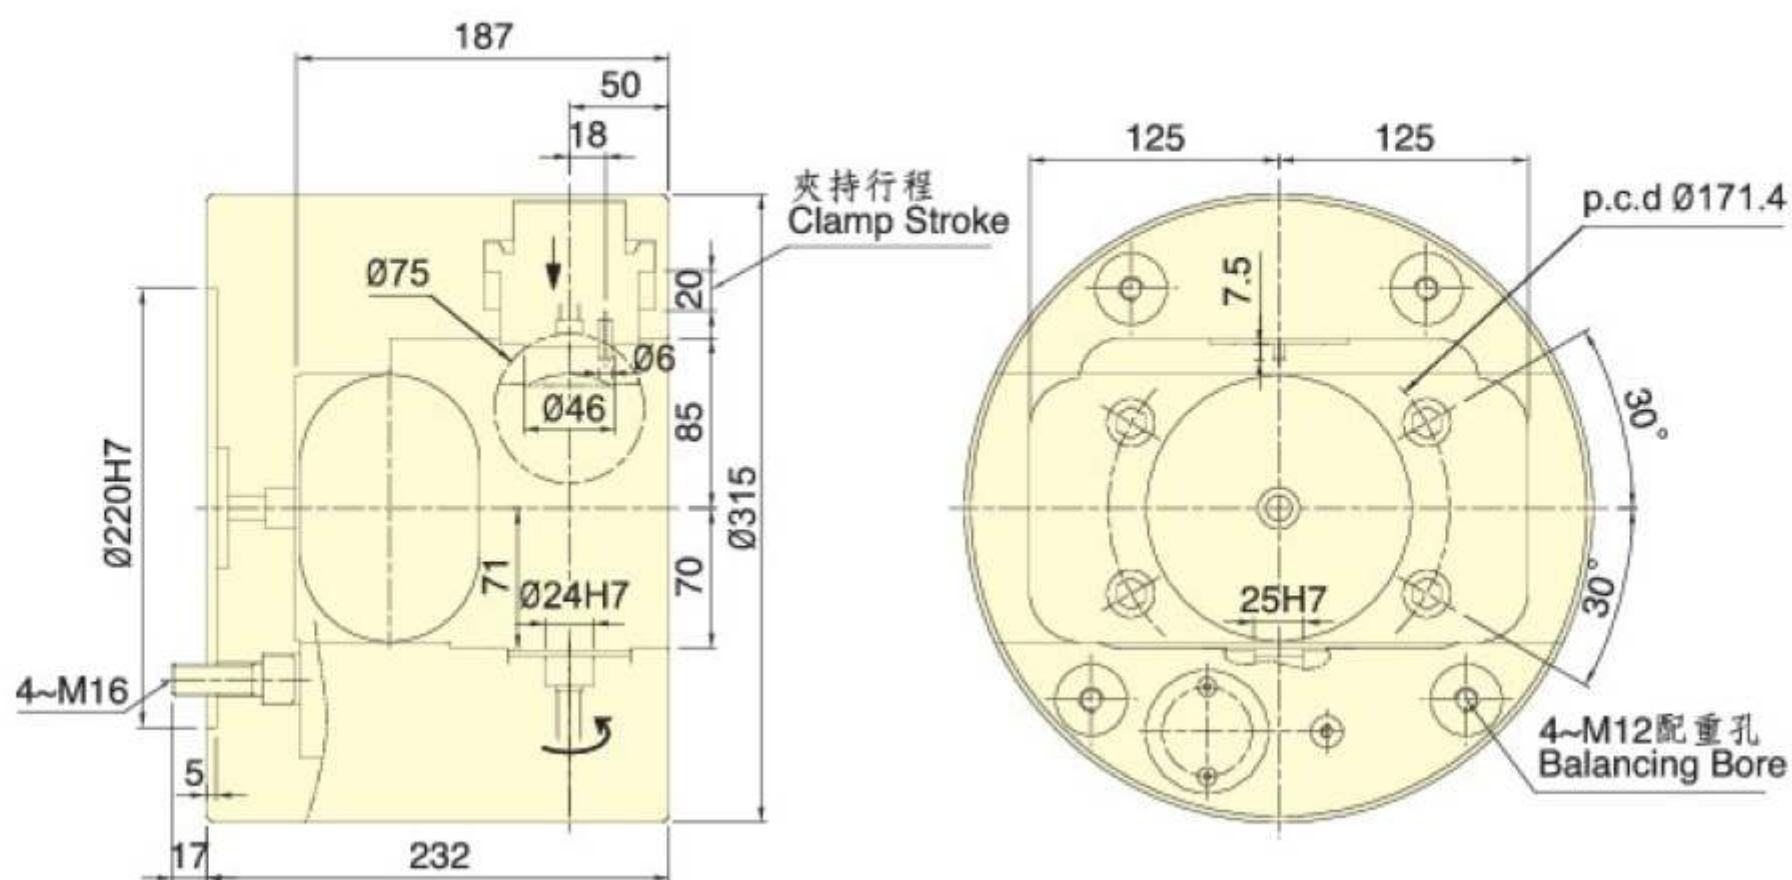

保留規格修改的權利
Subject to technical changes.

規格 Spec. 型號 Model	分度角度 Deg Index Angle	爪行程 mm Jaw Stroke	夾持範圍 Clamping Area mm 直徑 Dia Max. 長度 Len Max.	容許油壓壓力 kg/cm ² Max pressure	最大夾持力 kN(kgf) Max. clamping force	最高迴轉數 min ⁻¹ (r.p.m) Max. speed	I kg·m ²	重量 kg Weight	油壓迴轉接頭型 ROTATING JOINT	主軸內孔 mm Main Spindle Bore
IS-320	8x45,4x90	20	100 230	45	25.0(2550)	1800	1.13	76.0	IS-320	86+0.1