


34096

TUNNEL TYPE DEMAGNETIZER / MAGNETIZER



FEATURES:

- Super efficacy in demagnetizing and magnetizing; suitable for any kinds of metals.
- Merely using tools to pass through or move into a tunnel will cause a good effect.
- Suitable for planned automatic process; be adapted for delivery belts to proceed in order to increase productivity.
- Suitable for longtime use; be able to use continuously for 24 hours.
- Suitable for large production of component spare parts, attachments, tools, etc.
- Suitable for hand manual tools, etc. for filling magnetism.
- Attached a fan inside for dissipating heat.
- Special specifications will be made subject to customer's requirements.




Unit:mm

Order No.	Model	POWER SOURCE	CAPACITY	DUTY CYCLE	A	B	L	W	H	N. W.
34096-10	CC-1015-220V	AC 220V (SINGLE PHASE)	3520VA	100%	100	150	370	370	200	50 kg
34096-12	CC-1015-380V	AC 380V (3 PHASE)								
34096-15	CC-1525-220V	AC 220V (SINGLE PHASE)	4840VA		150	250	470	370		65 kg
34096-17	CC-1525-380V	AC 380V (3 PHASE)								
34096-25	CC-2545-220V	AC 220V (3 PHASE)	4400VA		250	450	700	500		84 kg
34096-30	CC-2545-380V	AC 380V (3 PHASE)								

34100

HANDY TYPE DEMAGNETIZER

● HD-123-A

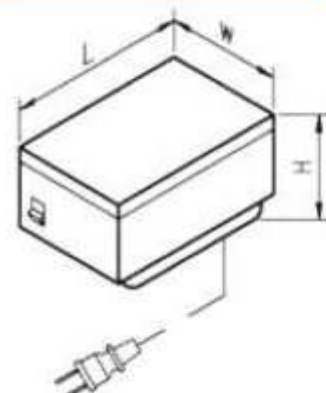

FEATURES :

- Suitable for big machines, steel plates, molds, etc. for handy way demagnetization.
- Small physical volume; light weight; easy to carry.
- Automatic Temperature Protection: When temperature reaches to the setting point, the power will be off automatically, and then it will restart to work when temperature comes down.

Unit:mm

Order No.	Model	POWER SOURCE	CAPACITY	DUTY CYCLE	L	W	H	N. W.
34100-11	HD-123	AC 110V	110VA	90%	128	83	83	1.8 kg
34100-22	HD-123	AC 220V	110VA	90%	128	83	83	1.8 kg

34105


STANDARD TYPE DEMAGNETIZER

● HD-200



FEATURES :

- Suitable for general component spare parts, attachments, tools, etc. for fixed way demagnetization.
- Suitable for longtime use; be able to use continuously for 24 hours.
- With the design of double coils inside to avoid heat release.

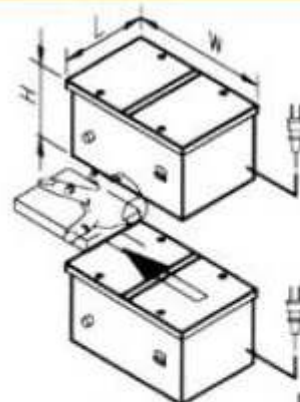

Unit:mm

Order No.	Model	POWER SOURCE	CAPACITY	DUTY CYCLE	L	W	H	N. W.
34105-11	HD-200	AC 110V	330VA	100%	150	200	100	8.5kg
34105-22	HD-200	AC 220V	330VA	100%	150	200	100	8.5kg

34107

SUPER POWER DEMAGNETIZER

• HD-420x220V3



- IT'S SUITABLE TO DEMAGNETIZE ON ACCESSORIES · PARTS · BIG MOLD · BIG STEEL PLATE.
- THE RANGE OF DEMAGNETIZATION IS 400mm.(16")
- THE EFFECTIVE THICKNESS OF WORKING PIECE IS 70MM.
- SUITABLE FOR THE MATERIAL WHICH HARD TO DEMAGNETIZE. EX:HIGH CARBON STEEL · BALL BEARING STEEL · CHROME-SILICON STEEL · SPRING STEEL · MOLD STEEL. EVEN THE MAGNETIC STEEL. THAT WILL MAKE EFFECTIVE DEMAGNETIZATION.
- SUITABLE FOR THICK WORK-PIECE, AND DEMAGNETIZED ONE TIME DIRECTLY.
- IT WORKS CONTINUOUS.
- SPECIAL DIMENSION IS WELCOME.



Unit:mm

Order No.	Model	MAIN POWER	ELECTRIC CURRENT	UTILITY RATE	WEIGHT
34107-22	HD-420 × 220V3	AC 220V (3 PHASE)	8A	CONTINUOUS	40 kg
34107-38	HD-420 × 380V3	AC 380V (3 PHASE)			

34108

SUPER POWER DEMAGNETIZER

• HDS-500x220V3



- IT'S SUITABLE TO DEMAGNETIZE ON ACCESSORIES · PARTS · BIG MOLD · BIG STEEL PLATE.
- THE RANGE OF DEMAGNETIZATION IS 400mm.(16")
- THE EFFECTIVE THICKNESS OF WORKING PIECE IS 110MM.
- SUITABLE FOR THE MATERIAL WHICH HARD TO DEMAGNETIZE. EX:HIGH CARBON STEEL · BALL BEARING STEEL · CHROME-SILICON STEEL · SPRING STEEL · MOLD STEEL. EVEN THE MAGNETIC STEEL. THAT WILL MAKE EFFECTIVE DEMAGNETIZATION.
- SUITABLE FOR THICK WORK-PIECE, AND DEMAGNETIZED ONE TIME DIRECTLY.
- IT WORKS CONTINUOUS.
- SPECIAL DIMENSION IS WELCOME.



Unit:mm

Order No.	Model	MAIN POWER	ELECTRIC CURRENT	UTILITY RATE	WEIGHT
34108-22	HDS-500 × 220V3	AC 220V (3 PHASE)	9A	CONTINUOUS	69.5 kg
34108-38	HDS-500 × 380V3	AC 380V (3 PHASE)			

34110


POWERFUL TYPE DEMAGNETIZER

• HD-280



FEATURES :

- Suitable for large production of component spare parts, attachments, tools, etc. for fixed way demagnetization.
- Suitable for longtime use; be able to use continuously for 24 hours.
- Be adapted for delivery belts to proceed automatic demagnetization.
- Use for wide range; very effective.
- Attached a fan inside for dissipating heat.
- Special specifications will be made subject to customers' requirements.



Unit:mm

Order No.	Model	POWER SOURCE	CAPACITY	DUTY CYCLE	L	W	H	N.W.
34110-11	HD-280	AC 110V	550VA	100%	200	280	130	15 kg
34110-22	HD-280	AC 220V	550VA	100%	200	280	130	15 kg