




APPLICATION:

- Suitable for heavy and light grinding, it can also be used in liquid.

FEATURES:

- While turning magnetic ON/OFF, the flat face's accuracy of magnetic force surface doesn't change and keep high precision processing surface.
- The fine-pitched magnetic poles make it ideally suitable for small and thin works.
- Made from permanent magnet, with strong and less remanent magnetism.
- Specially designed for steady and high precision operation.
- Drag magnetic force, average 13 kgf magnetic attraction

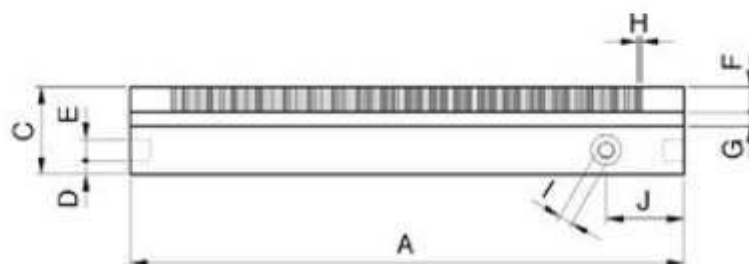

Unit:mm

Order No.	Model	NOMINAL DIMENSION	CHUCKING FACE				POLE PITCH H	CHUCK MOUNTING PART				HEIGHT C	I	J	N. W. (kg)
			B	A	F	G		B	A	D	E				
34066-05	MCL-1530W	150×300	150	300	18	10	2(1+1)	150	300	15	15	58	10	56	22
34066-10	MCL-1535W	150×350	150	350	18	10	2(1+1)	150	350	15	15	58	10	56	24
34066-13	MCL-1540W	150×400	150	400	18	10	2(1+1)	150	400	15	15	58	10	56	28
34066-15	MCL-1545W	150×450	150	450	18	10	2(1+1)	150	450	15	15	58	10	56	31
34066-20	MCL-2040W	200×400	200	400	18	10	2(1+1)	200	400	15	15	58	10	56	37
34066-25	MCL-2045W	200×450	200	450	18	10	2(1+1)	200	450	15	15	58	10	56	41
34066-30	MCL-2050W	200×500	200	500	18	10	2(1+1)	200	500	15	15	58	10	56	45
34066-35	MCL-2550W	250×500	250	500	18	10	2(1+1)	250	500	15	15	58	10	56	60