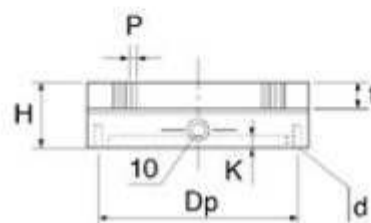



34041**ROUND FINE POLE PERMANENT MAGNETIC CHUCK**

● HRW

**Appication:**

Attached to rotary grinders for operations.

Features:

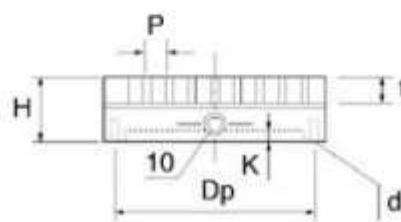

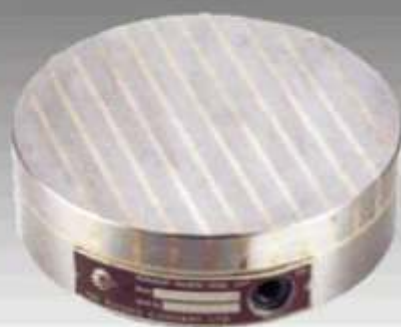
Enables the grinding of thin objects and small objects that has hitherto been impossible.
Precision of the finished product has been improved.

Unit:mm

Order No.	Model	Nominal Dimension	Face Plate			Chuck Mounting					Height	N.W.
			D	Le	t	P	K	Dp	n	d		
34041-12	HRW-13	Ø 125	125	80	18	2(1+1)	2	112	4	M6	52	5.0
34041-16	HRW-16	Ø 160	160	115	18	2(1+1)	2	140	4	M8	52	8.0
34041-20	HRW-20	Ø 200	200	155	18	2(1+1)	2	180	4	M8	52	13.0
34041-25	HRW-25	Ø 250	250	205	18	2(1+1)	2	224	4	M10	58	21.0
34041-30	HRW-30	Ø 300	300	255	18	2(1+1)	2	260	4	M10	58	33.5

34042**ROUND PERMANENT MAGNETIC CHUCK**

● HRC

**Appication:**

Attached to rotary grinders for operations.

Features:

Enables the grinding of thin objects and small objects that has hitherto been impossible.
Precision of the finished product has been improved.

Unit:mm

Order No.	Model	Nominal Dimension	Face Plate			Pole pitch	Chuck Mounting				Height	N.W.
			D	Le	t		K	Dp	n	d		
34042-12	HRC-13	Ø 125	125	80	18	11(2+9)	2	112	4	M6	52	5.0
34042-16	HRC-16	Ø 160	160	115	18	11(2+9)	2	140	4	M8	52	8.0
34042-20	HRC-20	Ø 200	200	155	18	11(2+9)	2	180	4	M8	52	13.0
34042-25	HRC-25	Ø 250	250	205	18	15(3+12)	2	224	4	M10	58	21.0
34042-30	HRC-30	Ø 300	300	255	18	15(3+12)	2	260	4	M10	58	33.5