


ROTATING AIR CYLINDER



- 迴轉閥體與缸體皆採用特殊輕合金製造而成，重量輕。
- 迴轉閥經特殊設計，能使壓縮空氣的消耗量大量減少，充分發揮高經濟效益。
- The rotary valve and cylinder body, all made of special light alloy, are light-weight.
- Through unique design, the rotary valve can considerably reduce the waste in compressing air and efficiently increase its utilization.
- 使用時，請混入微量的油霧。
- When used, a little oil mist should be contained.

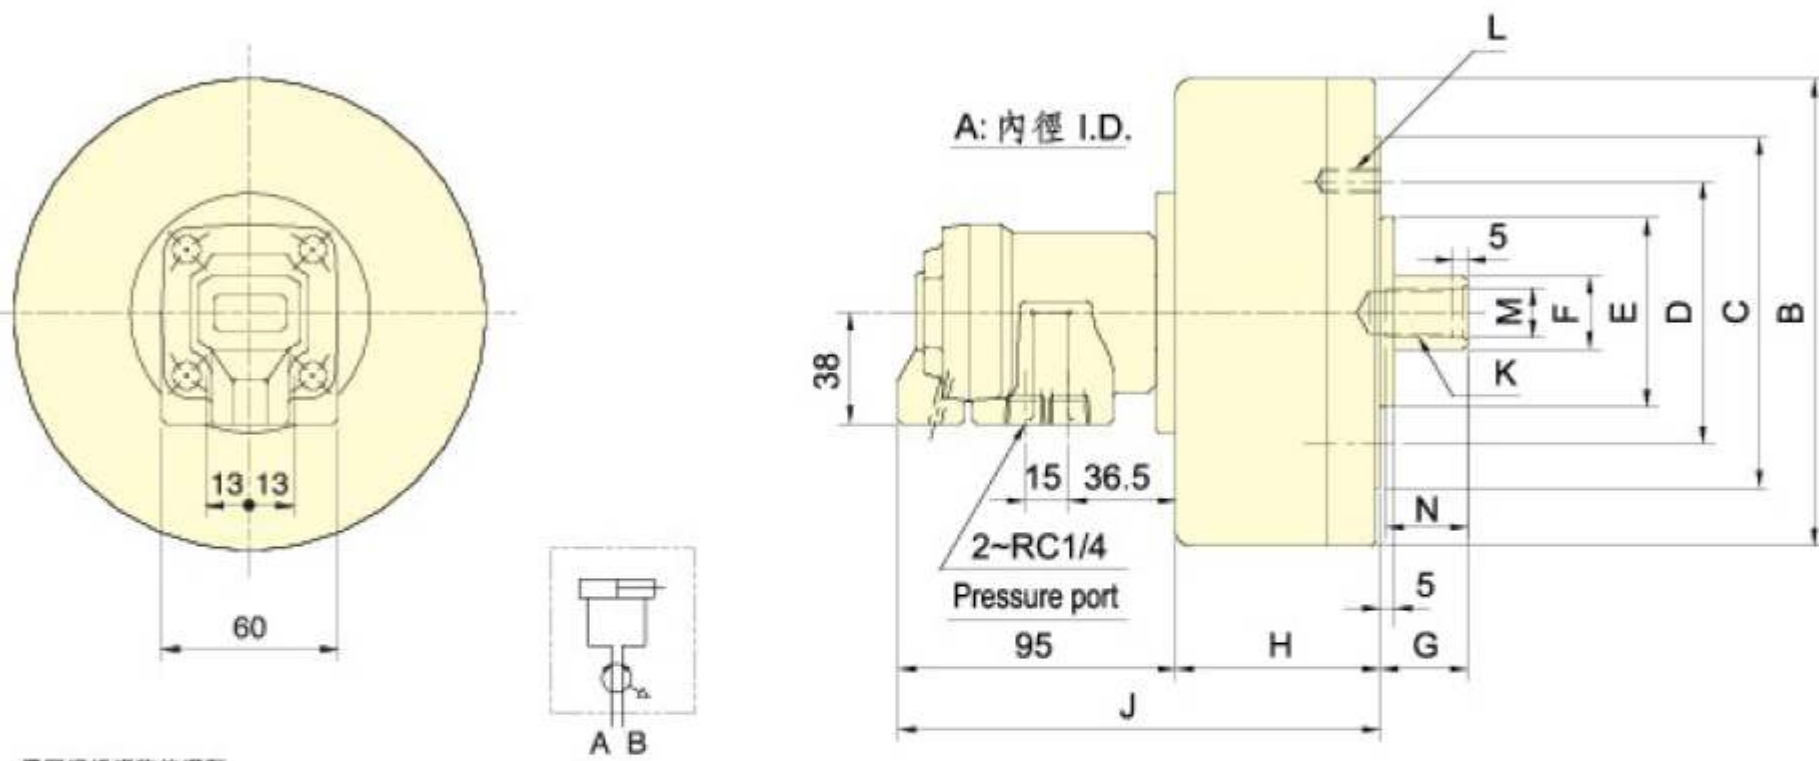

保留規格修改的權利
 Subject to technical changes.

規格 Spec.	活塞面積 Eff. piston area cm ²		行程 mm	最高迴轉數 min ⁻¹ (r.p.m)	最高使用壓力 MPa	I kg·m ²	重量 kg
型號 Model	伸側 Extend	拉側 Retract	Piston stroke	Max. speed	Max. pressure (kg/cm ²)	Moment of inertia	Weight
RA-100	77.0	74.4	15	6000	0.8(8)	0.03	4.5
RA-130	131.2	124.7		5000		0.05	5.2
RA-170	225.4	219.0	20			0.18	8.5
RA-220	378.6	369.3	25	4000		0.36	14.5
RA-270	571.0	562.9	30	3000		0.75	18.4

寸法 Size 型號 Model	A	B	C	D	E h7	F	G		H	J	K	L	M H8	N
							max.	min.						
RA-100	100	130	—	80	60	22	50	35	65	160	M12x1.75	6~M8x16	13	25
RA-130	130	160	120	90	65	25	45	30	70	165	M16x2.0		17	30
RA-170	170	200	140	100	80				85	180				
RA-220	220	255	170	130	110	30	50	25	91	186	M20x2.5	6~M12x20	21	35
RA-270	270	305	190			35	55		105	200	M24x3.0		25	40